

# **HKN ECE 210 Exam 3 Review Session**

Corey Snyder  
Tim Klem

# Topics



- Fourier Transform
  - Signal Energy and Bandwidth
  - LTI System Response with Fourier Transform
  - Modulation, AM, Coherent Demodulation
  - Impulse Response and Convolution
  - Sampling and Analog Reconstruction
  - LTIC and BIBO Stability
-

# Fourier Transform

- The Fourier Transform of a signal shows the frequency content of that signal
  - In other words, we can see how much power is contained at each frequency for that signal
  - ~~This is a big deal!~~
  - This is the biggest deal!

- $F(\omega) = \int_{-\infty}^{\infty} f(t)e^{-j\omega} dt$

- $f(t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} F(\omega)e^{j\omega t} d\omega$

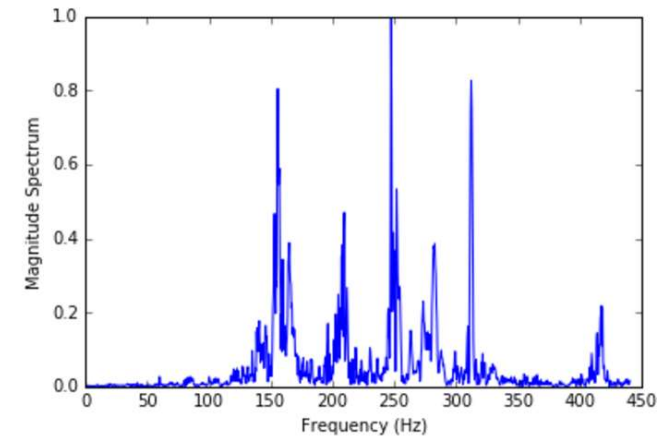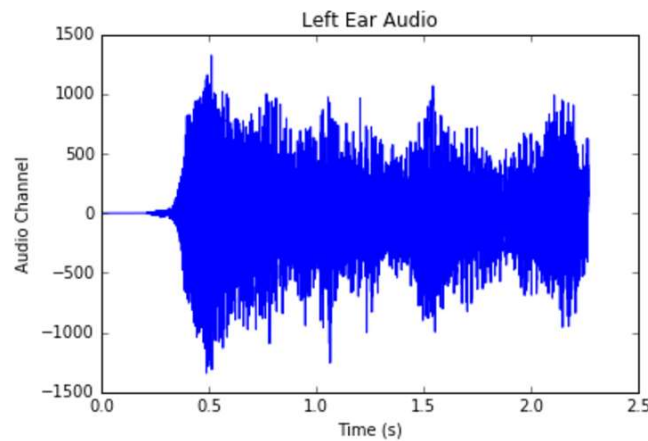

# Important Signals for Fourier Transform

- $rect\left(\frac{t}{T}\right) = \begin{cases} 1, & \text{for } |t| < \frac{T}{2} \\ 0, & \text{for } |t| > \frac{T}{2} \end{cases}$
- $u(t) = \begin{cases} 0, & \text{for } t < 0 \\ 1, & \text{for } t > 0 \end{cases}$
- $\Delta\left(\frac{t}{T}\right) = \begin{cases} 1 + \frac{2t}{T}, & \text{for } \frac{-T}{2} < t < 0 \\ 1 - \frac{2t}{T}, & \text{for } 0 < t < \frac{T}{2} \end{cases}$
- $sinc(t) = \begin{cases} \frac{\sin(t)}{t}, & \text{for } t \neq 0 \\ 1, & \text{for } t = 0 \end{cases}$

# Fourier Transform Tips

- Convolution in the time domain is multiplication in the frequency domain
  - Conversely, multiplication in the time domain is convolution in the frequency domain
- Scaling your signal can force properties to appear; typically time delay
  - Ex:  $e^{-2(t+1)}u(t-1) \rightarrow e^{-4}e^{-2(t-1)}u(t-1)$
- The properties really do matter! Take the time to acquaint yourself with them.
- Remember that the Fourier Transform is linear, so you can express a spectrum as the addition of two easier spectra
  - Ex: Staircase function
- Magnitude Spectrum is even symmetric, Angle Spectrum is odd symmetric for real valued signals

# Signal Energy and Bandwidth

- $Energy = W = \int_{-\infty}^{\infty} |f(t)|^2 dt = \frac{1}{2\pi} \int_{-\infty}^{\infty} |F(\omega)|^2 d\omega$ 
  - Energy signals can be either low-pass or band-pass signals
- Bandwidth for Low-pass Signals
  - 3dB BW
    - $\frac{|F(\Omega)|^2}{|F(0)|^2} = \frac{1}{2}$
  - r% BW
    - $\frac{1}{2\pi} \int_{-\Omega}^{\Omega} |F(\omega)|^2 d\omega = rW$
- Bandwidth for Band-pass signals
  - r% BW
    - $\frac{1}{\pi} \int_{-\Omega}^{\Omega} |F(\omega)|^2 d\omega = rW$  notice that r% BW for Band-pass signals is twice that of low-pass signals!

# LTI System Response using Fourier Transform

- Given the following LTI system:

$$f(t) \rightarrow \boxed{H(\omega)} \rightarrow y(t)$$

- $Y(\omega) = F(\omega)H(\omega)$
- Computationally speaking, and in future courses, we prefer to use Fourier Transforms instead of convolution to evaluate an LTI system
- Why?
  - So much faster, minimal error

# Modulation, AM Radio, Coherent Demodulation

- Modulation Property
  - If  $f(t) \leftrightarrow F(\omega)$ ,  $f(t) \cos(\omega_o t) \leftrightarrow \frac{1}{2}[F(\omega - \omega_o) + F(\omega + \omega_o)]$
- In general, for Amplitude Modulation in communications, we modulate with cosine in order to shift our frequency spectrum into different frequency bands
- Coherent Demodulation refers to the process of modulating a signal in order to make it band-pass, then modulating it back to the original low-pass baseband before low-pass filtering in order to recover the original signal
- Envelope detection is the process of Full-wave Rectification (absolute value), then low-pass filtering in order to extract the signal



# Impulse Response and Convolution

- Convolution
  - $x(t) * y(t) = \int_{-\infty}^{\infty} x(\tau)y(t - \tau)d\tau = \int_{-\infty}^{\infty} x(t - \tau)y(\tau)d\tau$
  - We “flip and shift” one signal and evaluate the integral of the product of the two signals at any value of t (our delay for the shift)
- Representing LTI Systems
  - $y(t) = x(t) * h(t)$ , where  $h(t)$  is the **impulse response** of the system
- Impulse Response is the system output to a  $\delta(t)$  input
- Graphical convolution helps to visualize the process of flipping and shifting

# Helpful Properties for Convolution

- Derivative
  - $h(t) * f(t) = y(t) \rightarrow \frac{d}{dt} h(t) * f(t) = h(t) * \frac{d}{dt} f(t) = \frac{d}{dt} y(t)$
  - Use of Derivative property: Finding the impulse response from the unit-step response
    - *If  $y(t) = u(t) * h(t)$ , then  $\frac{d}{dt} y(t) = \frac{d}{dt} u(t) * h(t) = \delta(t) * h(t) = h(t)$*
- Start Point
  - If the two signals have start points at  $t_1$  and  $t_2$ , then the start point of their convolution will be at  $t_1 + t_2$
- End Point
  - Similarly for the end points, if the two signals have end points at  $t_1$  and  $t_2$ , then the end point of their convolution will be at  $t_1 + t_2$
- Width
  - From the above two properties, we can see that if the two signals have widths  $W_1$  and  $W_2$ , then the width of their convolution will be  $W_1 + W_2$

# The Impulse Function $\delta(t)$

- The impulse function is the limit of  $\frac{1}{T} \text{rect}\left(\frac{t}{T}\right)$  as  $T \rightarrow 0$ 
  - Infinitesimal Width
  - Infinite Height
  - Of course, it integrates to 1. ( $0 * \infty = 1$ )
- Sifting
  - $\int_a^b \delta(t - t_o) f(t) dt = f(t_o)$  if  $t_o$  lies in your limits of integrations; 0 else
- Sampling
  - $f(t) \delta(t - t_o) = f(t_o) \delta(t - t_o)$
- Unit-step derivative
  - $\frac{du}{dt} = \delta(t)$

# Sampling and Analog Reconstruction

- If we have an original analog signal  $f(t)$
- Our digital samples of the signal are obtained through sampling property as:
  - $f[n] = f(nT)$  where  $T$  is our sampling period; this is Analog to Digital (A/D) conversion
- We must make sure to satisfy Nyquist Criterion:
  - $T < \frac{1}{2B}$  or  $f_s > 2B$
  - To learn more about Nyquist Criterion take ECE 110!

# Sampling and Analog Reconstruction

- If we have an original analog signal  $f(t)$
- Our digital samples of the signal are obtained through sampling property as:
  - $f[n] = f(nT)$  where  $T$  is our sampling period; this is Analog to Digital (A/D) conversion
- We must make sure to satisfy Nyquist Criterion:
  - $T < \frac{1}{2B}$  or  $f_s > 2B$
  - To learn more about Nyquist Criterion take ECE 110!
  - Jk take ECE 310

# Sampling and Analog Reconstruction

- If we have an original analog signal  $f(t)$
- Our digital samples of the signal are obtained through sampling property as:
  - $f[n] = f(nT)$  where  $T$  is our sampling period; this is Analog to Digital (A/D) conversion
  - This results in infinitely many copies of the original signal's Fourier Transform spaced by  $\frac{2\pi}{T}$
- We must make sure to satisfy Nyquist Criterion:
  - $T < \frac{1}{2B}$  or  $f_s > 2B$
  - To learn more about Nyquist Criterion take ECE 110!
  - Jk take ECE 310
- Following A/D conversion, we perform D/A conversion, then low-pass filter our signal in order to obtain our original signal according to the following relation
- $f(t) = \sum_n f_n \text{sinc}\left(\frac{\pi}{T}(t - nT)\right)$
- For a more complete explanation, take ECE 310!

## Sampling and Analog Reconstruction (cont'd)

- The complete mathematical relationship between the continuous frequency spectrum and the discrete time (sampled) spectrum in analog frequency

$$F_s(\omega) = \frac{1}{T} \sum_{k=-\infty}^{\infty} F\left(\omega + \frac{2\pi k}{T}\right)$$

- The nuances of this representation will be explored and clarified and ECE 310
- 

# BIBO Stability

- A system is BIBO stable if for any bounded input, we obtain a bounded output
- Two ways to check BIBO stability
- By the definition:
  - *If  $|f(t)| \leq \alpha < \infty$ , then  $|y(t)| \leq \beta < \infty \forall t$*
- By Absolute Integrability
  - $\int_{-\infty}^{\infty} |h(t)| dt < \infty$



# LTIC

- LTIC stands for Linearity Time-Invariance and Causality (sometimes called LSIC, where SI means Shift-Invariance)
- Linearity
  - Satisfy Homogeneity and Additivity
  - Can be summarized by Superposition
    - If  $x_1(t) \rightarrow y_1(t)$  and  $x_2(t) \rightarrow y_2(t)$ , then  $ax_1(t) + bx_2(t) \rightarrow ay_1(t) + by_2(t)$
- Shift Invariance
  - If  $x(t) \rightarrow y(t)$  then  $x(t - t_0) \rightarrow y(t - t_0) \forall t_0$  and  $x(t)$
- Causality
  - Output cannot depend on future input values

## Problem 1 SP16


- Consider a real-valued function  $f(t)$  with bandwidth  $\Omega$  and let  $\omega_c > \Omega$ . Obtain the bandwidth of the following functions All answers may be left in terms of  $\Omega$  and  $\omega_c$ .
  - (a)  $g_1(t) = f(t) \sin(\omega_c t)$
  - (b)  $g_2(t) = f(t) + \sin(\omega_c t)$
  - (c)  $g_3(t) = f(t) \sin^2(\omega_c t)$
  - (d)  $g_4(t) = f^2(t) \sin(\omega_c t)$
  - (e)  $g_5(t) = f(t) * \sin(\omega_c t)$
-

## Problem 3 FA16

- Given the circuit on the right:

(a) Find the step response

(b) Find the response to  $x(t) = \text{rect}\left(\frac{t-1}{2}\right)$

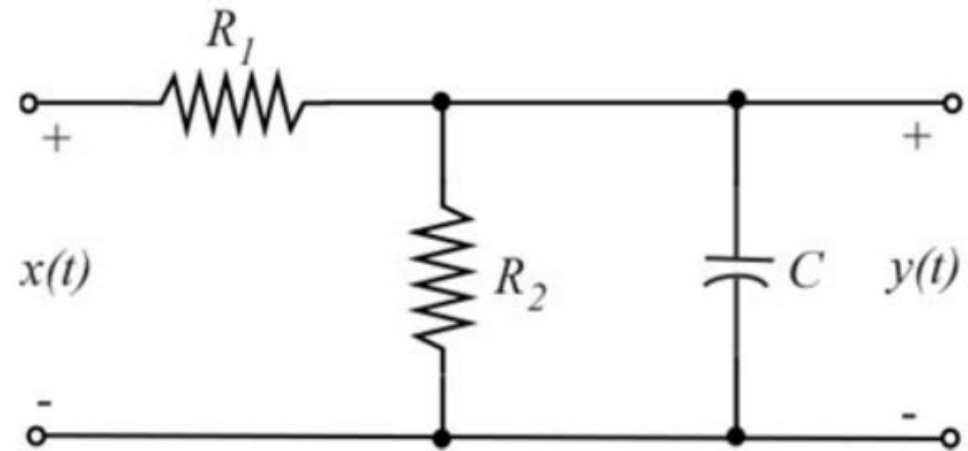

## Problem 3 SP14


(a) An impulse response is given by

$$h(t) = \text{rect}\left(\frac{t-1}{2}\right)e^{-t}$$

- i) Find the Fourier transform of  $h(t)$ .
- ii) If the input is  $f(t) = 2\text{rect}\left(\frac{t}{2}\right)$ , find the output  $y(t) = f(t) * h(t)$ .
- iii) If the input is  $f(t) = \frac{1}{a}\text{rect}(at)$ , find the output  $y(t) = f(t) * h(t)$ , when  $a \rightarrow 0$ .

## Problem 2 SP16

(a) For  $h(t)$  and  $f(t)$  shown below, compute the specified values for  $y(t) = f(t) * h(t)$

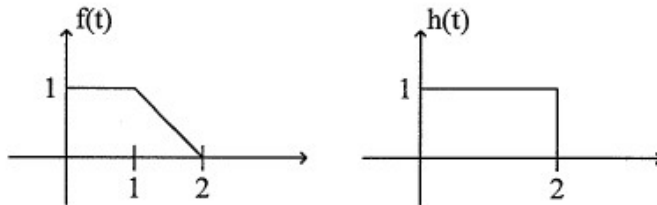

$$y(-0.5) = \underline{\hspace{2cm}}$$

$$y(0.5) = \underline{\hspace{2cm}}$$

$$y(1.5) = \underline{\hspace{2cm}}$$

$$y(2.5) = \underline{\hspace{2cm}}$$


$$y(3.5) = \underline{\hspace{2cm}}$$

$$y(4.5) = \underline{\hspace{2cm}}$$


(b) Let  $h(t) = e^{-2t}u(t)$  and  $f(t) = u(t - 4)$ . Find  $y(t) = f(t) * h(t)$  for all values of  $t$ .

# Problem 2 FA15


Consider the following system

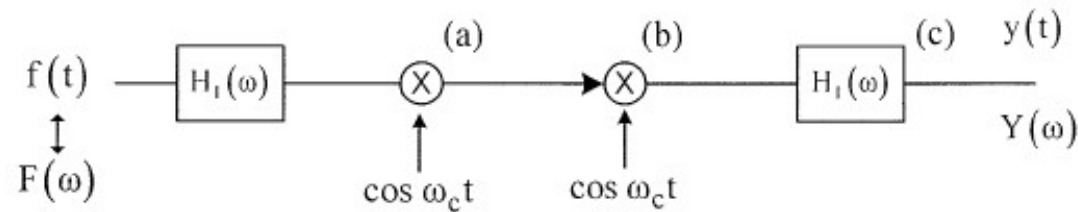

where  $f(t) = \text{rect} \left( \frac{t}{\tau} \right)$ ,  $\tau = 10^{-3}$  sec,  $\omega_c = 2\pi 10^6$  rad/sec and



a) What is  $F(\omega)$ ? Label axis carefully.

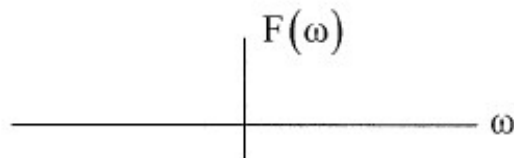


$F(\omega) =$  \_\_\_\_\_ (5 points)

b) Draw the signal spectrum at points, (a), (b) and (c). Label axis carefully.

## Problem 2 SP16

i) Consider this sampling/reconstruction system.

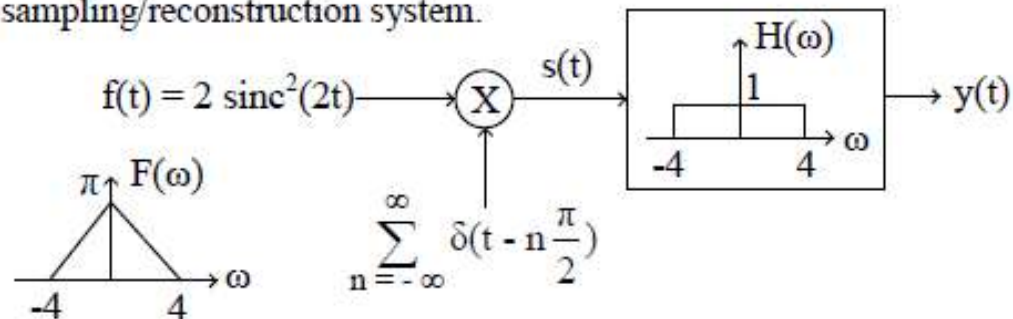

i) Circle the correct answer and explain it below.

$f(t)$  is: **UNDERSAMPLED** / **OVERSAMPLED** / **SAMPLED AT NYQUIST RATE**

Explanation:


ii) Sketch  $S(\omega)$  and  $Y(\omega)$  on the axes below.

iii) Determine  $y(t)$


# Problem 5 FA13

5. (8 pts) The two parts of this problem deal with impulse response, causality and BIBO stability.

(a) (4 pts) The figure below depicts a LTI system. Input signal  $f(t)$  produces the corresponding output  $y(t)$ .

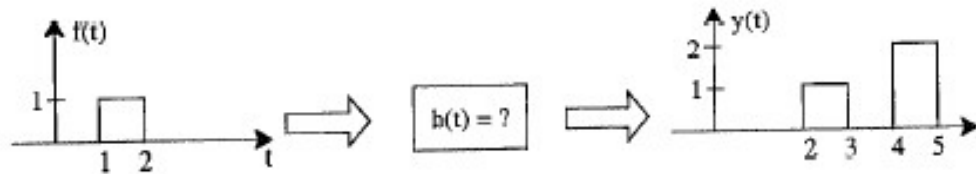

(b) (4 pts) The figure below depicts a LTI system. Input signal  $f(t)$  produces the corresponding output  $y(t)$ .

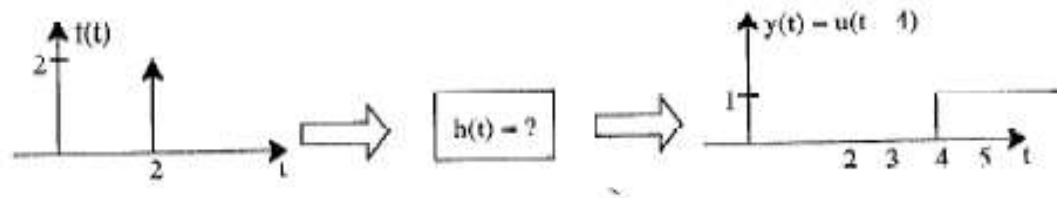

- a)i. Determine  $h(t)$
- ii. Is the system causal?
- iii. Is the system BIBO stable?
- b)i. Determine  $h(t)$
- ii. Is the system causal?
- iii. Is the system BIBO stable?